



PLANAR VERTICAL

With an exceptionally slim profile and silky-smooth surface, the Stelrad Planar offers a stylish alternative for domestic or commercial developments.

<i>RANGE</i>	12
<i>TYPES</i>	K2
<i>HEIGHTS (MM)</i>	1800, 2000, 2200
<i>LENGTHS (MM)</i>	400 - 700
<i>OUTPUTS (WATTS)</i>	1476 - 2961
<i>OUTPUTS (BTU/HR)</i>	5036 - 10103
<i>COLOURS</i>	36
<i>WORKING PRESSURE</i>	10 bar





Planar Vertical

 **Stelrad** Designer Series

50 Δt

(75/65/20°C)

K2



Height mm	Length mm	Sections	Stelrad UIN	Heat output	
				Watts	Btu/hr
1800	400	12	30182204	1476	5036
	500	15	30182205	1845	6295
	600	18	30182206	2214	7554
	700	21	30182207	2583	8813
2000	400	12	30202204	1584	5405
	500	15	30202205	1980	6756
	600	18	30202206	2376	8107
	700	21	30202207	2772	9458
2200	400	12	30222204	1692	5773
	500	15	30222205	2115	7216
	600	18	30222206	2538	8660
	700	21	30222207	2961	10103

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).


For further assistance on colour option UINs and prices, please contact the sales admin team on 0844 543 6200.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442


Type	K2		
	1800	2000	2200
Height	1800	2000	2200
W/m at 75/65/20	3690	3960	4230
n-coefficients	1.32	1.33	1.33
Heated surface area (m ² /m)	29.90	37.74	38.66
Weight (kg/m)	105.30	116.40	126.60
Water contents (l/m)	15.90	17.70	20.10
Wall to tap centre (mm)	77	77	77

Planar Vertical

PRESSURE DROPS

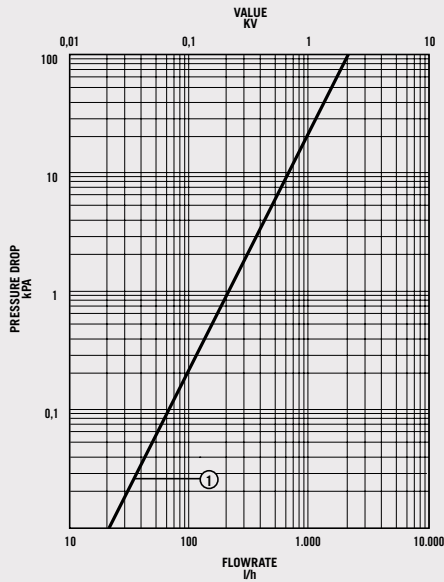

MOUNTING BRACKETS



Height


H2		H3		H4			
mm	in	mm	in	mm	in		
1800	70.87	70	2.75	830	43.89	1590	63.58
2000	78.74	70	2.75	930	47.83	1790	71.46
2200	86.61	70	2.75	1030	51.77	1990	79.33

CONNECTIONS


Each radiator comes with 1/2" inlet connections as standard.

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

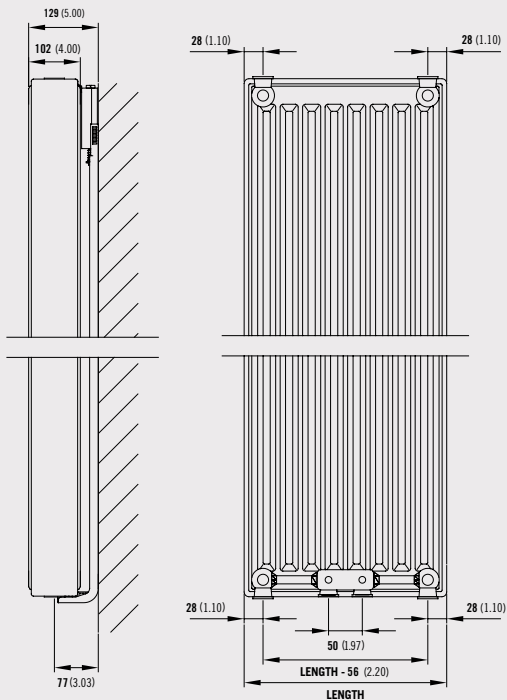

PIPING OPTIONS

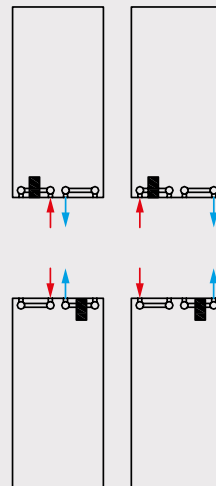

Comes complete with Stelrad's class leading safety bracket.

Colour Guide

A shade for every room, for every interior. Opt for warm elegance, baroque ambience or modern minimalism.

Colour information for the:

Vita Series - Vita Ultra*


Aqua Series - Caliente Rail, Caliente Curved Rail, Concord Rail & Vertical Ultra*

Designer Series - Compact with Style, Planar and Swing


Natural Colours




NT110
Papyrus white




NT120
Pearl white




NT130
Champagne




NT140
Beige




NT150
Beige grey




NT160
Pebble grey



NT170
Quartz grey




SN110
Cream white



SN120
Cream



SN130
Mocca



SN140
Bordeaux



SN150
Sepia



SN160
Pale blue



SN170
Black

Metallic Colours



ML110
Dove grey




ML120
Titanium grey



ML130
Blue grey




ML140
Granite



ML150
Cappuccino



ML160
Terra brown



ML170
Graphite black

RAL Colours




A1004
Golden yellow



A2003
Pastel orange



A3002
Carmine red



A3003
Robin red



A5002
Ultramarine blue




A6018
Yellow green



A7001
Silver grey



A7011
Iron grey



A7016
Anthracite grey



A7030
Stone grey



A7035
Light grey



A8017
Chocolate brown



A9003
Signal white



A9005
Jet black

*Please note: When choosing a colour for Vita and Vertical Ultra radiator only the front fascia panel can be coloured. Emitter, top grille and side panels are black.



RAL 9016**
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours.

The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.