



CONCORD VERTICAL & SLIMLINE

Offering visual appeal combined with advanced technology, the Concord range of radiators provides a contemporary solution for a wide range of building applications.

	<i>VERTICAL</i>	<i>SLIMLINE</i>
<i>RANGE</i>	6	8
<i>TYPES</i>	<i>Single</i>	<i>Single</i>
<i>HEIGHTS (MM)</i>	1800, 2000	1800, 2000
<i>LENGTHS (MM)</i>	440, 588, 736	320 - 640
<i>OUTPUTS (WATTS)</i>	780 - 1450	872 - 1956
<i>OUTPUTS (BTU/HR)</i>	2661 - 4947	2975 - 6674
<i>COLOURS</i>	35	35
<i>WORKING PRESSURE</i>	4.6 bar	4.6 bar
<i>STEEL THICKNESS</i>	1.5mm	1.5mm





RAL 1004 Golden yellow



Slimline



Slimline

Concord Vertical

 **Stelrad** Designer Series

50 Δt

(75/65/20°C)

Height mm	Length mm	Elements	Tap centres	Stelrad UIN	Heat output	
					Watts	Btu/hr
1800	440	6	440	148340	780	2661
	588	8	588	148341	1040	3548
	736	10	736	148342	1300	4436
2000	440	6	440	148343	870	2968
	588	8	588	148344	1160	3958
	736	10	736	148345	1450	4947

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).


EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Vertical	
Height	1800	2000
W/m at 75/65/20	1770	1972
n-coefficients	1.31	1.31
Heated surface area (m ² /m)	3.95	4.36
Weight (kg/m)	45.14	49.77
Water contents (l/m)	9.68	10.64
Wall to tap centre (mm)	44	44

STEEL THICKNESS 1.5mm

FIXING POSITIONS

All dimensions in mm. Inches in brackets.

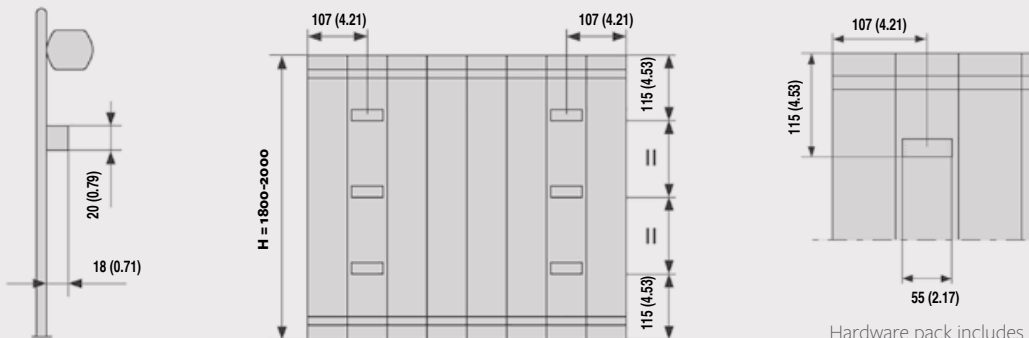

Hardware pack includes air vents, saddle clips & branding clips.


Concord Vertical

Stelrad Designer Series

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.


Type	From back of radiator to wall D		From wall to centre of connections D1		From front of radiator to wall D2	
	mm	mm	mm	mm	mm	mm
Vertical	25	0.98	44	1.73	70	2.76

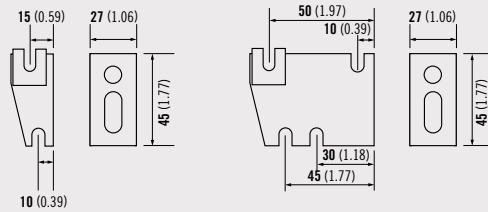

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

PIPING INSTRUCTIONS



Concord Slimline

Stelrad Designer Series

50 Δt

(75/65/20°C)

Height mm	Length mm	Elements	Tap centres	Stelrad UIN	Heat output Watts	Btu/hr
1800	320	8	320	148300	872	2975
	440	11	440	148301	1199	4091
	520	13	520	148302	1417	4835
	640	16	640	148303	1744	5951
2000	320	8	320	148304	978	3337
	440	11	440	148305	1344	4586
	520	13	520	148306	1589	5422
	640	16	640	148307	1956	6674

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442


Type	Slimline	
Height	1800	2000
W/m at 75/65/20	2725	3056
n-coefficients	1.30	1.31
Heated surface area (m ² /m)	6.90	7.65
Weight (kg/m)	77.81	78.50
Water contents (l/m)	17.50	19.25
Wall to tap centre (mm)	50	50

STEEL THICKNESS 1.5mm

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

Type	Back face to finished wall D		Connection centres from finished wall D1		Front face from finished wall D2	
	mm	mm	mm	mm	mm	mm
Slimline	35	1.38	50	1.97	130	5.12

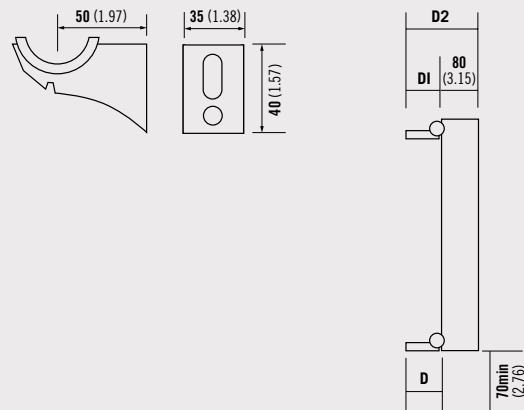

CONNECTIONS


Each radiator comes with 1/2" inlet connections as standard.

FIXING POSITIONS

All dimensions in mm. Inches in brackets.



PIPING INSTRUCTIONS



Colour Guide

With Stelrad, you can heat your home in colour.
Choose from a full range of stylish radiator colours.

Colour information for the:
Aqua Series - Vistaline and Ellipse
Designer Series - Classic Column and Concord

RAL Colours

						
RAL 7035 Pale grey	RAL 7038 Agate grey	RAL 7036 Platinum grey	RAL 7030 Stone grey	RAL 7037 Dusty grey	RAL 7015 Slate grey	RAL 9005* Jet black
						
RAL 8017 Chocolate brown	RAL 1016 Sulphur yellow	RAL 1021 Cadmium yellow	RAL 1004 Dark Golden yellow	RAL 2008 Light red orange	RAL 3000 Flame red	RAL 3003 Ruby red
						
RAL 3005 Wine red	RAL 6027 Light green	RAL 6034 Pastel turquoise	RAL 6019 Pastel green	RAL 6033 Turquoise blue	RAL 6020 Chrome green	RAL 6005 Light moss green
						
RAL 5014 Pigeon blue	RAL 5002 Ultramarine blue	RAL 5024 Pastel blue	RAL 5022 Night blue	RAL 5010 Gentian blue	RAL 9016** Traffic white	RAL 9010 Pure white
						
RAL 9001 Cream	RAL 1013 Pearl white	RAL 1015 Light ivory	RAL 9002 Grey white			

Metallic Colours

		
2765G Metallic silver	BR 0004 Gilded aluminium	BR 0007*** Satin metal grey

For further information on RAL colours
please visit www.ralcolor.com



RAL 9016**
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours.

The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.