

The Stelrad Vertical Ultra radiator is as unique as you are with the option of one or two towel rails that can be tailored to suit any bathroom or kitchen.

VERTICAL ULTRA

Boutique Series

50 Δt


(75/65/20°C)



Front Panel Height mm	Emitter Height mm	Front Panel Length mm	Emitter Length mm	Stelrad UIN	Heat output Watts	Btu/hr
1040	1000	470	400	86110224	857	2924
		570	500	86110225	1071	3654
		670	600	86110226	1285	4384
1240	1200	470	400	86112224	999	3409
		570	500	86112225	1249	4262
		670	600	86112226	1499	5115
1840	1800	470	400	86118224	1476	5036
		570	500	86118225	1845	6295
		670	600	86118226	2214	7554
2040	2000	470	400	86120224	1584	5405
		570	500	86120225	1980	6756
		670	600	86120226	2376	8107

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV	UIN	Elements
		14531310
	14531312	CENTRE TAP TRV STRAIGHT WHITE -1/2IN
	14531315	CENTRE TAP TRV STRAIGHT WHITE -15MM
	14531410	CENTRE TAP TRV STRAIGHT CHROME -10MM
	14531412	CENTRE TAP TRV STRAIGHT CHROME -1/2IN
	14531415	CENTRE TAP TRV STRAIGHT CHROME -15MM
	14531510	CENTRE TAP TRV ANGLED L WHITE -10MM
	14531512	CENTRE TAP TRV ANGLED L WHITE -1/2IN
	14531515	CENTRE TAP TRV ANGLED L WHITE -15MM
	14531610	CENTRE TAP TRV ANGLED L CHROME -10MM
	14531612	CENTRE TAP TRV ANGLED L CHROME -1/2IN
	14531615	CENTRE TAP TRV ANGLED L CHROME -15MM
	14531710	CENTRE TAP TRV ANGLED R WHITE -10MM
	14531712	CENTRE TAP TRV ANGLED R WHITE -1/2IN
	14531715	CENTRE TAP TRV ANGLED R WHITE -15MM
	14531810	CENTRE TAP TRV ANGLED R CHROME -10MM
	14531812	CENTRE TAP TRV ANGLED R CHROME -1/2IN
	14531815	CENTRE TAP TRV ANGLED R CHROME -15MM

Fits emitter length	Stelrad UIN
400mm wide	83200004
500mm wide	83200005
600mm wide	83200006

Radiator Height	Max no. of bars
1000	1
1200	2
1800	3
2000	3

Towel rail bar is 120mm wider than actual radiator.
Maximum three towel rail bars per radiator.


For more information visit www.stelrad.com

VERTICAL ULTRA

Boutique Series

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

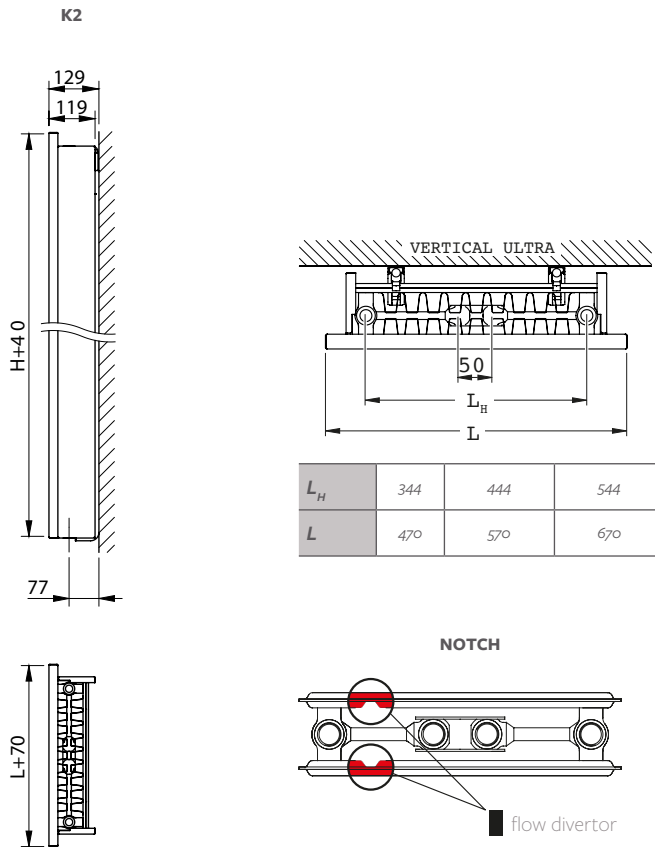

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

VERTICAL ULTRA

Boutique Series

PIPE CONNECTIONS

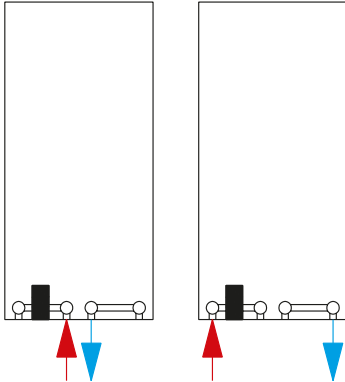


TABLE OF HEAT OUTPUTS AT:


Inlet	75°C	Watt to Btu/hr:
Outlet	65°C	3.412
Ambient	20°C	3.412
Delta T	50°C	3.412

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	T22 (K2)			
	1000	1200	1800	2000
Height (mm)	1000	1200	1800	2000
W/m at 75/65/20	2142	2498	3690	3960
n-coefficients	1.29	1.30	1.33	1.33
Heated surface area (m ² /m)	26.23	27.15	29.90	37.74
Weight (kg/m)	59.40	71.80	105.30	116.40
Water contents (l/m)	10.30	12.30	15.90	17.70
KM	13.62	15.66	20.70	21.98

COLOUR GUIDE

NATURAL COLOURS

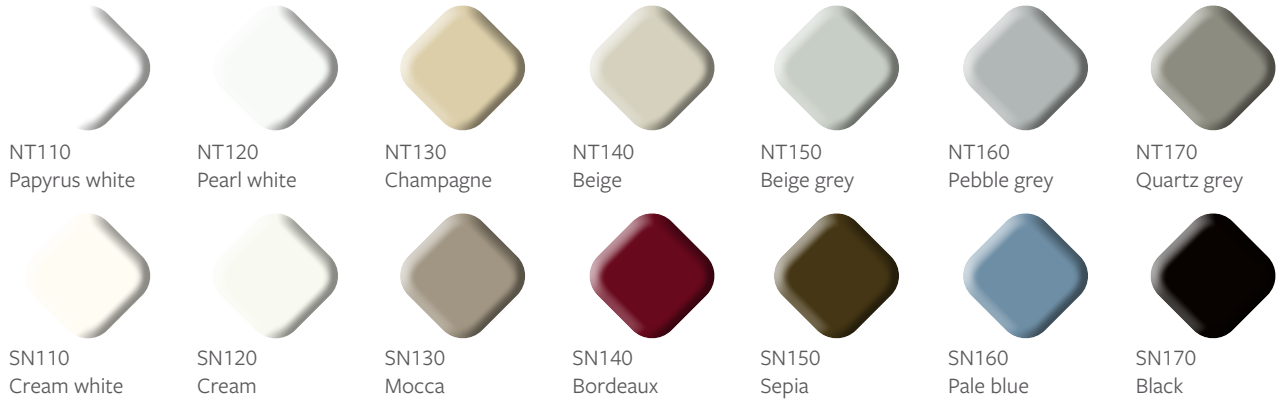

METALLIC COLOURS



RAL COLOURS



FOR FURTHER INFORMATION ON RAL COLOURS PLEASE VISIT WWW.RALCOLOR.COM

*Please note: when choosing a colour only the front fascia panel can be coloured, the emitter, top grille and panels are black.



RAL 9016**
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email marketing@stelrad.com