



VITA COMPACT K3

Vita Series

50 Δt

(75/65/20°C)

K3



Height mm	Length mm	Sections	Stelrad UIN	Heat output	
				Watts	Btu/hr
600	400	12	76603304	956	3262
	500	15	76603305	1195	4077
	600	18	76603306	1433	4889
	700	21	76603307	1672	5705
	800	24	76603308	1911	6520
	900	27	76603309	2150	7336
	1000	30	76603310	2389	8151
	1100	33	76603311	2628	8967
	1200	36	76603312	2867	9782
	1400	42	76603314	3345	11413

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


VITA COMPACT K3

Vita Series


WALL MOUNTING AND LUG INFORMATION

All dimensions in mm. Inches in brackets.


REAR ELEVATION

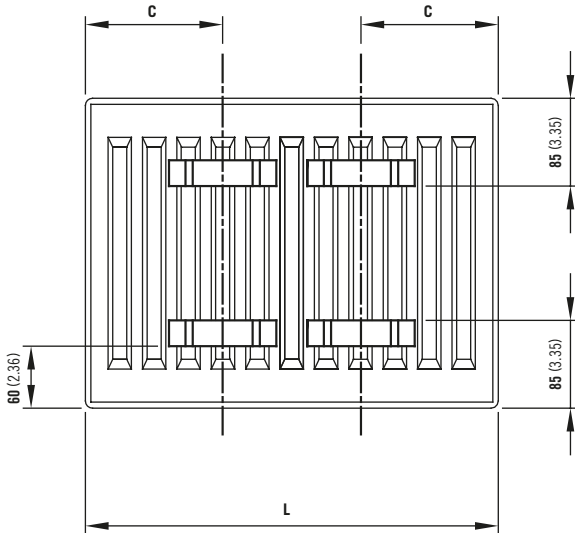

SIDE ELEVATION

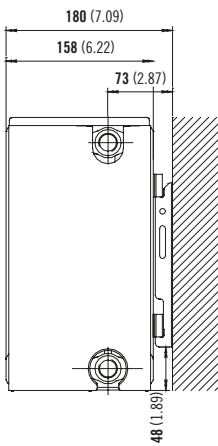

TOP ELEVATION




L	C
400 - 1100	133
1200 - 2400	133

VITA COMPACT K3



Vita Series

FLOORSTANDING BRACKETS

All dimensions in mm. Inches in brackets.

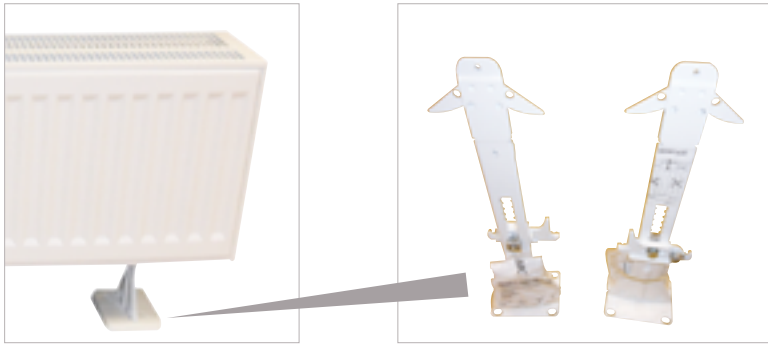

Floor brackets

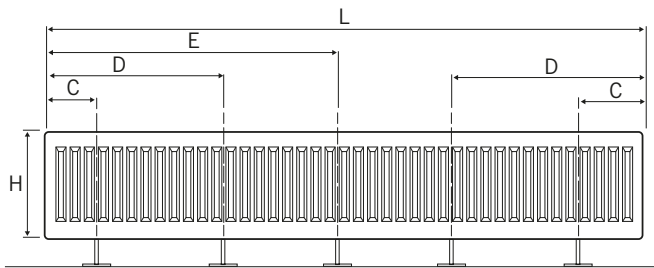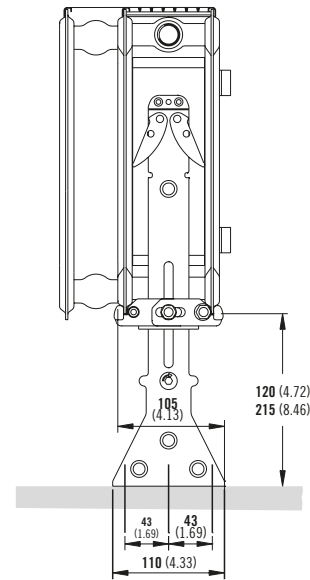

	L	400	500 - 1100	1200	1400 - 1800	2000 - 3000
H	Number	2pc				3pc
300	C	117	150	250	250	250
500	E	-	-	-	-	L/2+17

	L	400	500 - 1100	1200	1400 - 1800	2000	2200	2400	2600	2800	3000
H	Number	2pc			3pc	4pc			5pc		
600	C	117	150	250	250	250			250		
700	D	-	-	-	-	750	817	850	750	817	850
	E	-	-	-	817	-	-	-	L/2+17		

CONNECTIONS


Each radiator comes with 1/2" inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K3
Height	600
W/m at 75/65/20	2389
n-coefficients	1.32
Heated surface area (m2/m)	11.61
Weight (kg/m)	52.50
Water contents (l/m)	9.80
Wall to tap centre (mm)	73

VITA COMPACT K3

PRESSURE DROPS

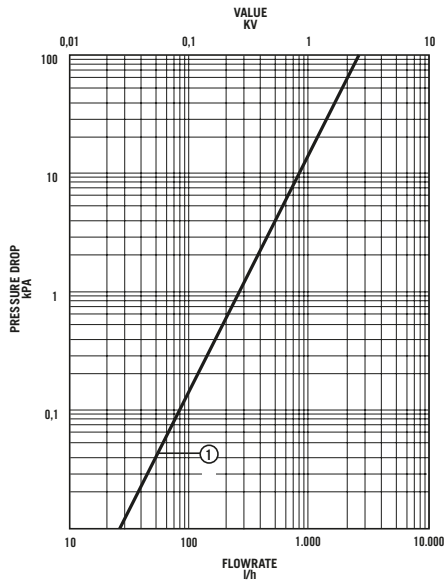

① Type 33 (K3)