




COMPACT WITH STYLE VERTICAL

Stunning good looks are combined with the quality and performance you would expect from Stelrad.

<i>RANGE</i>	32
<i>TYPES</i>	P2, K2
<i>HEIGHTS (MM)</i>	1600, 1800, 2200
<i>LENGTHS (MM)</i>	300 - 700
<i>OUTPUTS (WATTS)</i>	693 - 2772
<i>OUTPUTS (BTU/HR)</i>	2365 - 9458
<i>COLOURS</i>	36
<i>WORKING PRESSURE</i>	10 bar



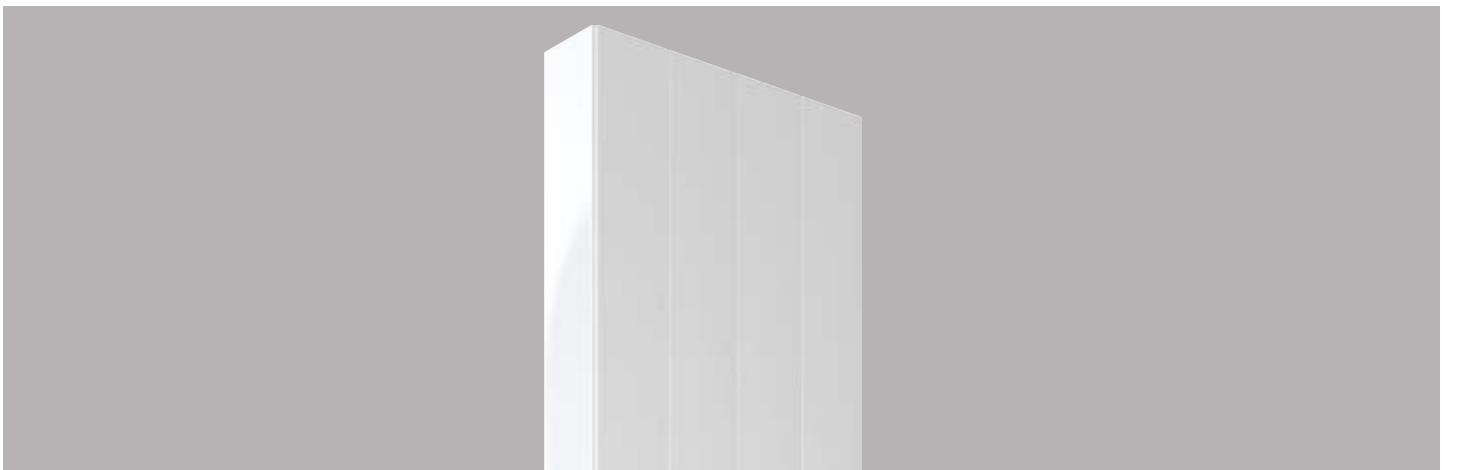

Compact with Style Vertical Stelrad® Designer Series


50 Δt

(75/65/20°C)

P2



K2



Height mm	Length mm	Sections	Stelrad UIN	Heat output		Stelrad UIN	Heat output	
				Watts	Btu/hr		Watts	Btu/hr
1600	300	9	148140	693	2365	-	-	-
	500	15	148148	1155	3942	-	-	-
	600	18	148152	1386	4730	-	-	-
1800	300	9	148141	760	2594	-	-	-
	400	12	-	-	-	32182204	1476	5036
	500	15	148149	1266	4321	32182205	1845	6295
	600	18	148153	1519	5184	32182206	2214	7554
2000	700	21	-	-	-	32182207	2583	8813
	300	9	148142	824	2812	-	-	-
	400	12	-	-	-	32202204	1588	5405
	500	15	148150	1374	4689	32202205	1980	6756
	600	18	148154	1649	5628	32202206	2376	8107
2200	700	21	-	-	-	32202207	2772	9458
	300	9	148143	887	3027	32222203	1269	4330
	400	12	-	-	-	32222204	1692	5773
	500	15	148151	1479	5048	32222205	2115	7216
600	18	148155	1775	6058	32222206	2538	8660	

Δt_{50} is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt_{40} or Δt_{30} output (see your installer or system designer or download from www.stelrad.com).


EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	P2				K2			
	1600	1800	2000	2200	1600	1800	2000	2200
Height	1600	1800	2000	2200	1600	1800	2000	2200
W/m at 75/65/20	2310	2532	2748	2958	3420	3690	3960	4230
n-coefficients	1.27	1.27	1.27	1.27	1.32	1.32	1.33	1.33
Heated surface area (m ² /m)	7.33	8.25	9.17	10.09	28.99	29.90	37.74	38.66
Weight (kg/m)	77.70	86.70	95.40	105.60	94.20	105.30	116.40	126.60
Water contents (l/m)	14.10	16.20	18.30	20.10	14.10	15.90	17.70	20.10
Wall to tap centre (mm)	65	65	65	65	77	77	77	77

Compact with Style Vertical Designer Series

WALL MOUNTING INFORMATION


All dimensions in mm. Inches in brackets.

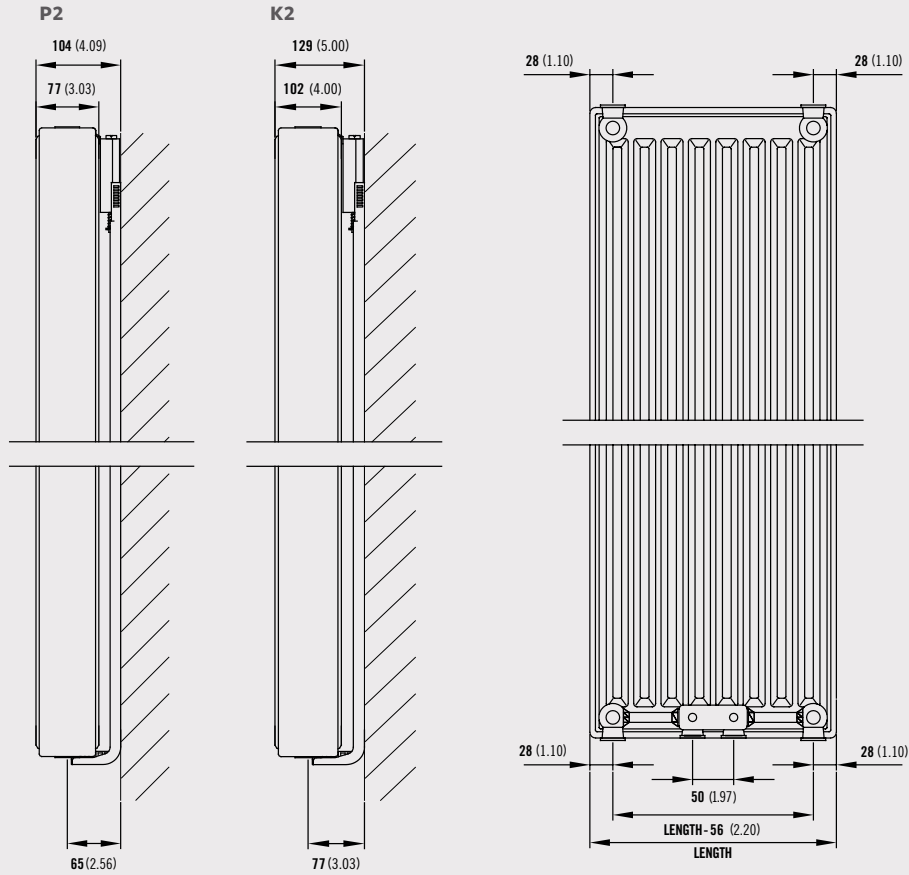

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

PRESSURE DROPS

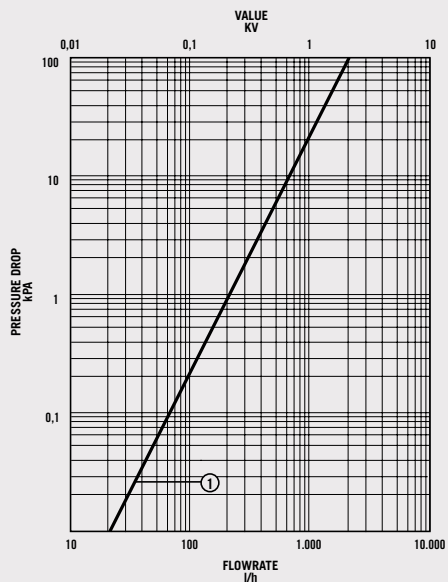


① Type 20 (P2), 22 (K2)


Compact with Style Vertical Stelrad® Designer Series

MOUNTED BRACKETS

Height		H2		H3		H4	
mm	inches	mm	inches	mm	inches	mm	inches
1600	63	70	2.75	730	36.02	1390	55.71
1800	70.90	70	2.75	830	43.89	1590	63.58
2000	78.70	70	2.75	930	47.83	1790	71.46
2200	86.60	70	2.75	1030	51.77	1990	79.33

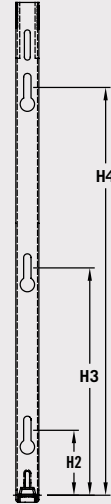

PIPING OPTIONS

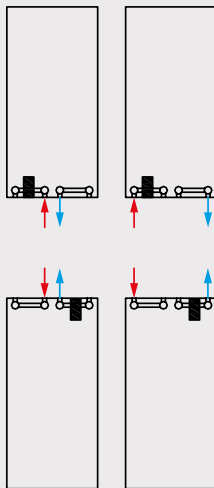

Colour Guide

A shade for every room, for every interior. Opt for warm elegance, baroque ambience or modern minimalism.

Colour information for the:

Vita Series - Vita Ultra*


Aqua Series - Caliente Rail, Caliente Curved Rail, Concord Rail & Vertical Ultra*

Designer Series - Compact with Style, Planar and Swing


Natural Colours




NT110
Papyrus white




NT120
Pearl white




NT130
Champagne




NT140
Beige




NT150
Beige grey




NT160
Pebble grey



NT170
Quartz grey




SN110
Cream white



SN120
Cream




SN130
Mocca




SN140
Bordeaux



SN150
Sepia



SN160
Pale blue



SN170
Black

Metallic Colours




ML110
Dove grey




ML120
Titanium grey



ML130
Blue grey




ML140
Granite



ML150
Cappuccino



ML160
Terra brown



ML170
Graphite black

RAL Colours




A1004
Golden yellow



A2003
Pastel orange



A3002
Carmine red



A3003
Robin red



A5002
Ultramarine blue




A6018
Yellow green



A7001
Silver grey



A7011
Iron grey



A7016
Anthracite grey



A7030
Stone grey



A7035
Light grey



A8017
Chocolate brown



A9003
Signal white



A9005
Jet black

*Please note: When choosing a colour for Vita and Vertical Ultra radiator only the front fascia panel can be coloured. Emitter, top grille and side panels are black.



RAL 9016**
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours.

The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.